



# EASYGATE

**DRIVE UNIT:**  
**MATERIALS:**

MOTORIZED  
FRAME: PAINTED KOMAX, RAL COLOUR FINISH  
INLAY: 304 GRADE BRUSHED STAINLESS STEEL  
WING PANEL: 10MM TEMPERED GLASS  
SIDE PANEL: 304 GRADE BRUSHED STAINLESS STEEL



**FUNCTION:**

PASSAGE IN BOTH DIRECTIONS, ELECTRONICALLY CONTROLLED.  
A SIGNAL FROM ACCESS CONTROL OR IDENTIFICATION SYSTEM OR PUSH BUTTON WILL OPEN THE GATE. UNAUTHORIZED ACCESS BY TAILGATING, ENTERING WITHOUT VALID IDENTIFICATION CARD OR ENTERING FROM OPPOSITE DIRECTION ACTIVATES THE BUILT-IN ALARM SYSTEM

**OPERATION MODES:**

NORMALLY OPEN (N/O)  
• ALWAYS OPEN WALKWAY IN STANDBY POSITION AND IT CLOSE ONLY AT UNAUTHORIZED ENTRY OR TAILGATING  
NORMALLY CLOSED (N/C)  
• ALWAYS CLOSED WALKWAY IN STANDBY POSITION AND IT OPENS IN CASE THE ACCESS AUTHORIZATION IS POSSITIVE

**SAFETY DEVICE:**

7 PHOTOCELLS TO DETECT UNAUTHORIZED ACCESS OR TAILGATING AND PREVENT FROM PERSONAL INJURY  
INTELLIGENT ELECTRONICS DETECTING AN OBSTRUCTION AND REVERSING THE MOTION.

**POWER FAILURE:**


IN CASE CASE OF POWER FAILURE THE PANELS EITHER REMAINS IN THE CURRENT POSITION OR THEY CAN BE MANUALLY OPENED

**FIRE ALARM:**

INPUT CONTACTS FOR VOLTAGE FREE SIGNAL TO ACTIVATE FAIL-SAFE FUNCTION (AUTOMATIC GATE OPENING FOR FAST EVACUATION)

**POWER SUPPLY:**

230V AC, 50Hz (EXTERNAL POWER SUPPLY)  
BACK-UP ACCUMULATOR (OPTIONAL)

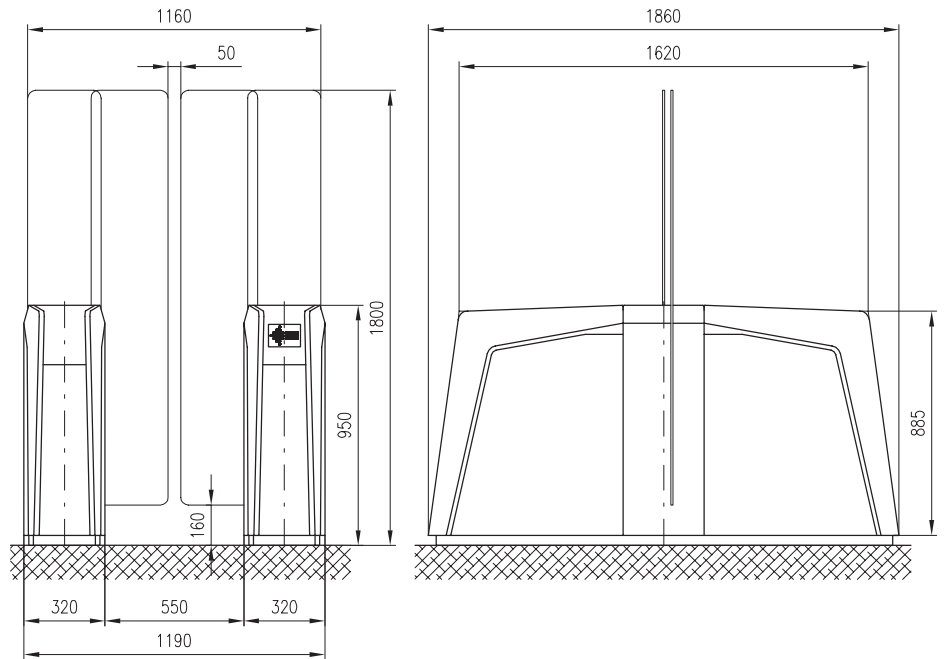

**MOTOR AND LOGIC VOLTAGE:** 12V DC  
**ACCESSORIES:**

- BATTERY BACK-UP
- CARD READER MOUNTING
- PUSH BUTTON CONTROL

